


CROSS EARTHING ROD with the QCER® quick coupling

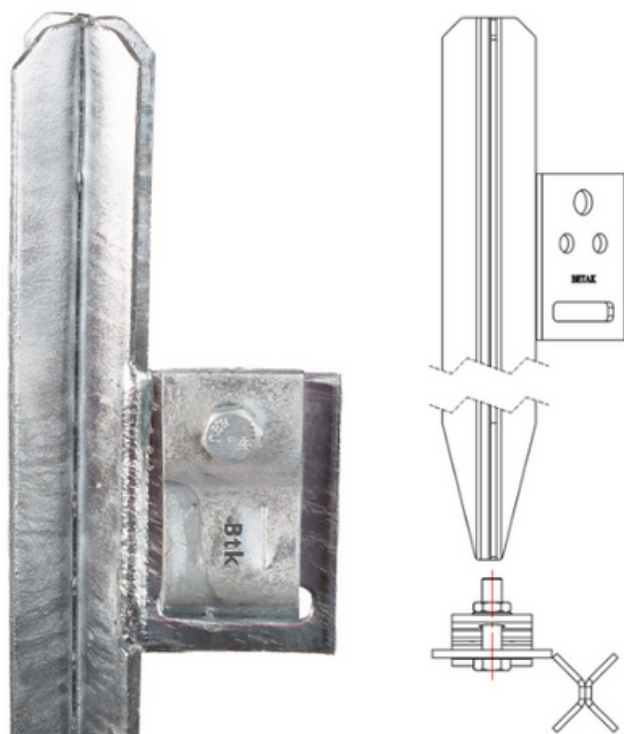

TECHNICAL SPECIFICATIONS

- Cross profile 50x50x3 mm
- Hot-dip galvanized Z350
- Medium zinc layer $\geq 70 \mu\text{m}$
- Provided with connection terminal compatible with the QCER® quick coupling system

MANUFACTURING STANDARDS:

ICECON CERT CERTIFIED PRODUCT

no. 01205.1/08.10.2021 și no. 01291.1/15.04.2022

SR EN 62561-2:2018+AC/2020

Components of lightning protection systems

SR EN 10025-2 | SR EN 10149-2 | SR EN 10111 | SR EN 10130

Steel grade

SR EN 10051 | SR EN 22768-1,2 | SR EN 10149-1

Dimensional tolerances

SR EN ISO 1461 galvanized

SYSTEM CERTIFICATION

TÜV Rheinland

(ISO 9001, ISO 14001 și ISO 45001)

Quality, Environment, Occupational Health and Safety

QCER® QUICK COUPLER HOT DIP GALVANIZED

Production Standards:

- Manufactured according to: STF-003/2008
- Hot dip galvanized, according to SR EN ISO 1461/2002
- Zinc layer according to: SR EN ISO 2178/1998
- Checking of adherence: SR EN ISO 2819/1996
- Steel quality: S235JR, S420MC, according to SR EN 10025-2/2005

DIMENSIONS

Length	Weight
1,0 m	2,66 kg
1,5 m	3,96 kg
2 m	5,16 kg
2,5 m	6,36 kg
3 m	7,56 kg

